

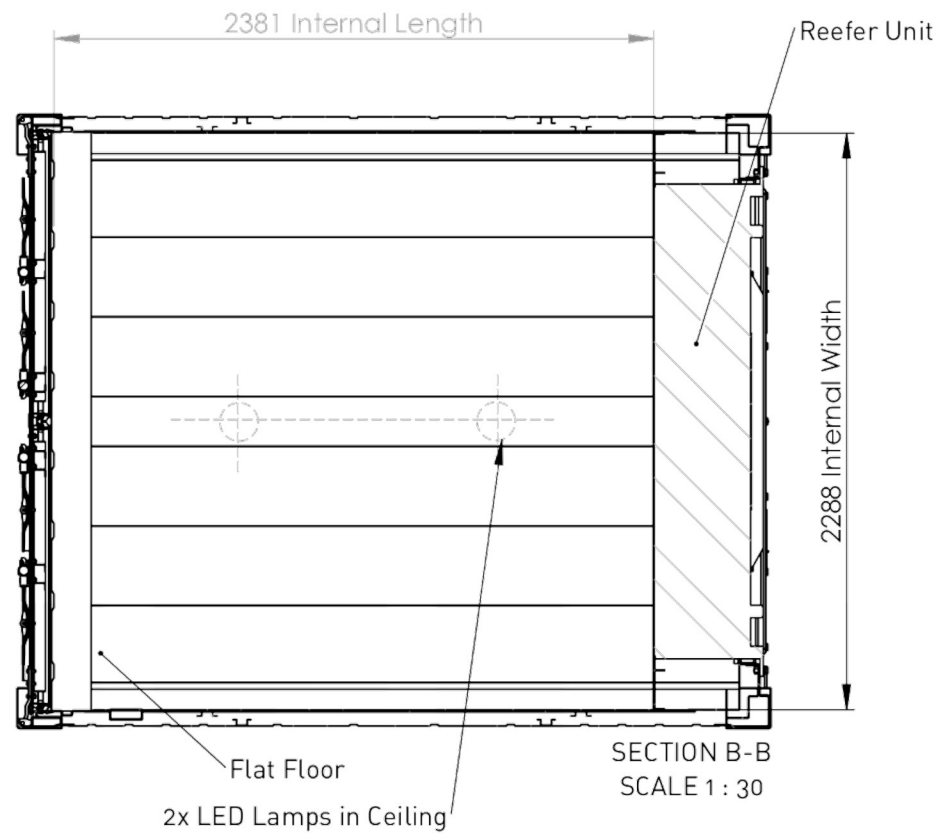
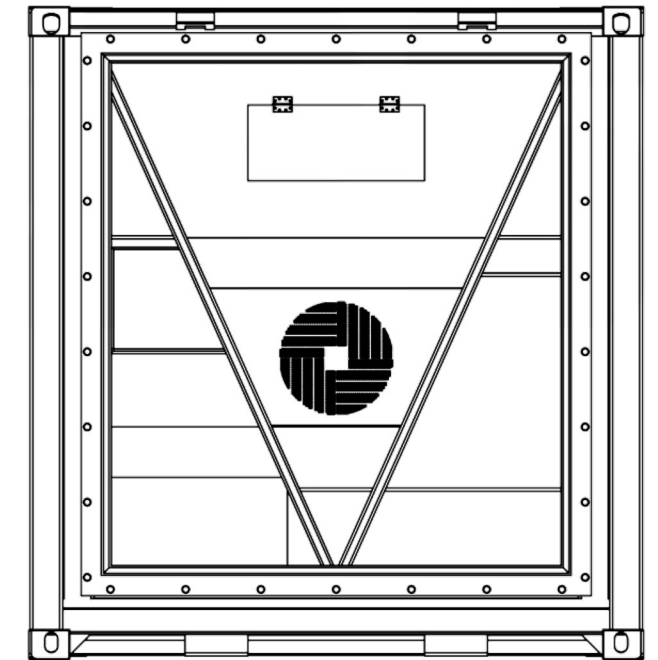


Max. Gross Weight	15,000 KG	33,070 LBS
Container Weight (Reefer Unit)	1,500 (380) KG	3,310 (838) LBS
Max. Payload	13,120 KG	28,920 LBS
Cubic Capacity	12.4 m ³	440 ft ³
Floor Area	5.5 m ²	59 ft ²
Insulation Density	40 - 55 kg/m ³	2.5 - 3.4 lb/ft ³

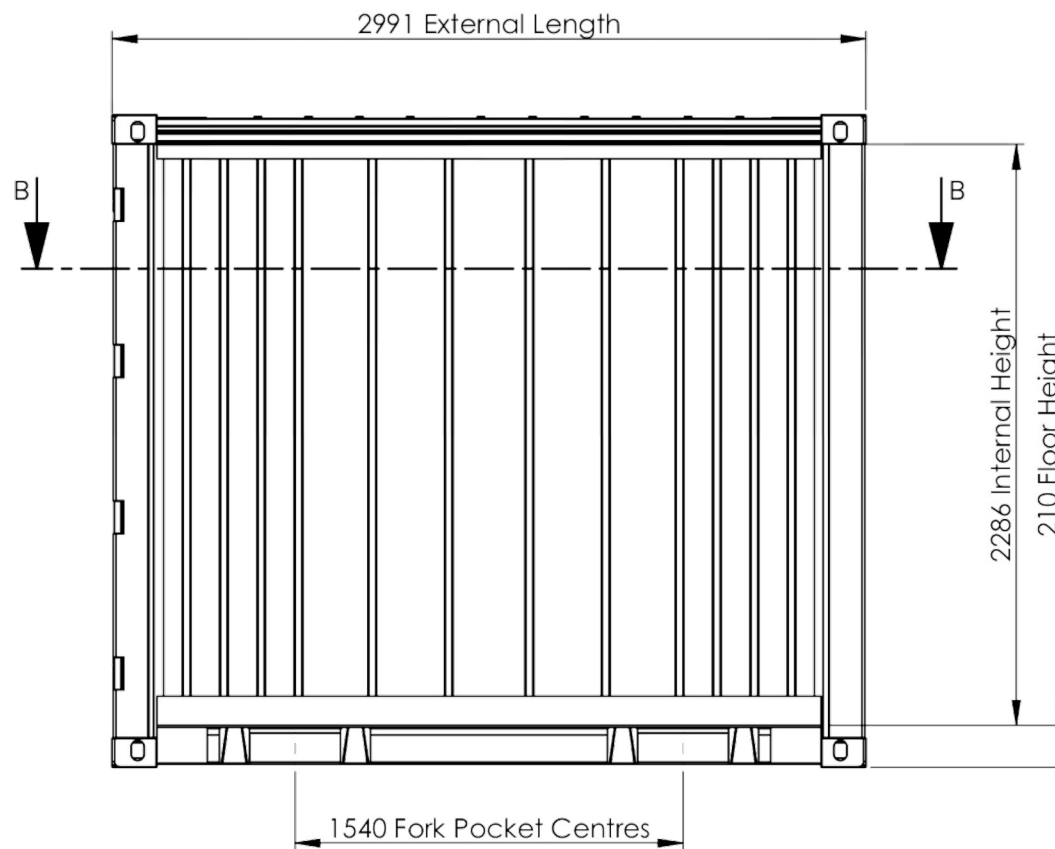

Notes:
1. Cargo doors as standard. Some models may include a 'butchers' door, either in lieu of the cargo doors, or recessed behind. The Butchers door will reduce internal length by approx. 200mm. Units with butchers doors will include integrated panic alarm systems, emergency lighting above the door, and automatic reefer cut-off switches to cease operation when the door is opened, among other features.

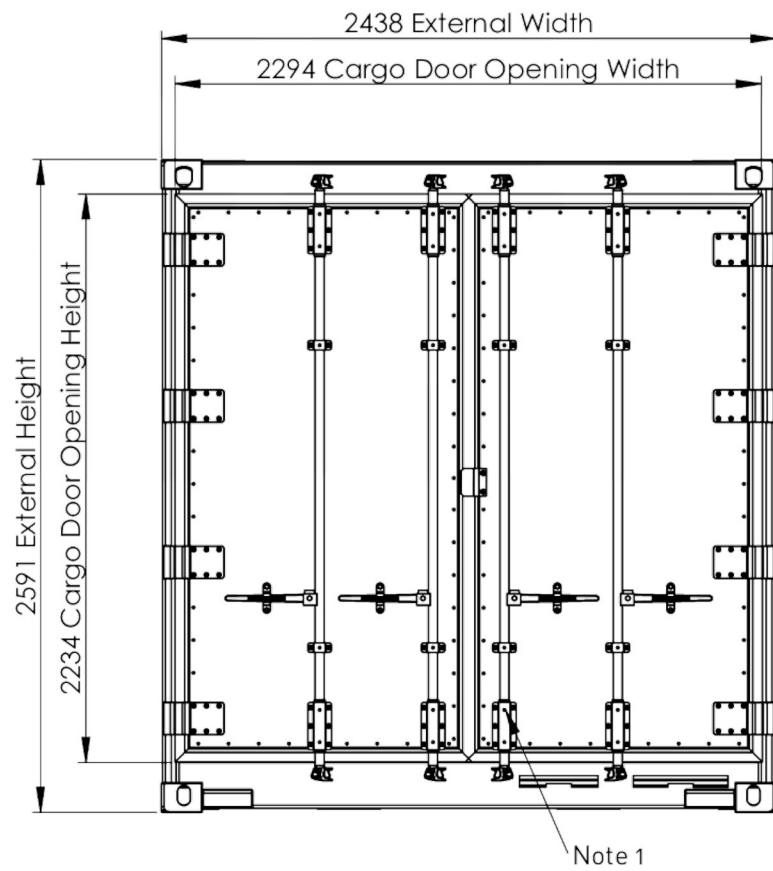

	NAME	SIGNATURE	DATE
DRAWN	JM		29/01/2019
APPV'D			

Preliminary Drawing for Information Only	
REVISION:	DO NOT SCALE DRAWING
PROJECT:	Thermaright Containers Standard Containers
DESCRIPTION:	10' Refrigerated Container Standard Height Hire Specification
	A3
©2019 Thermaright	SCALE: 1:30 (UNLESS STATED OTHERWISE) SHEET 1 OF 1