
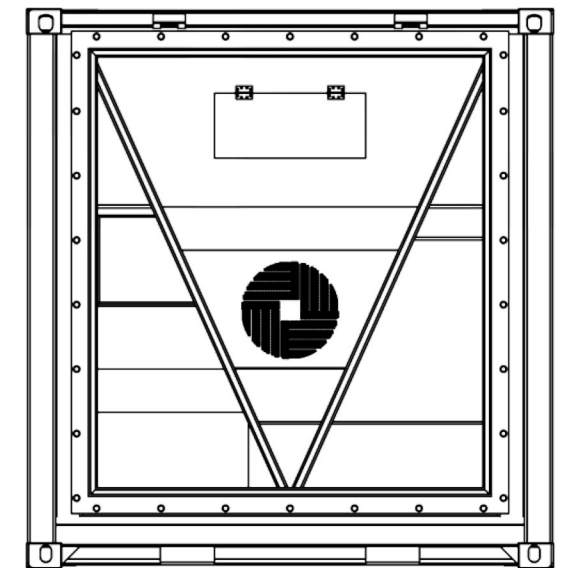
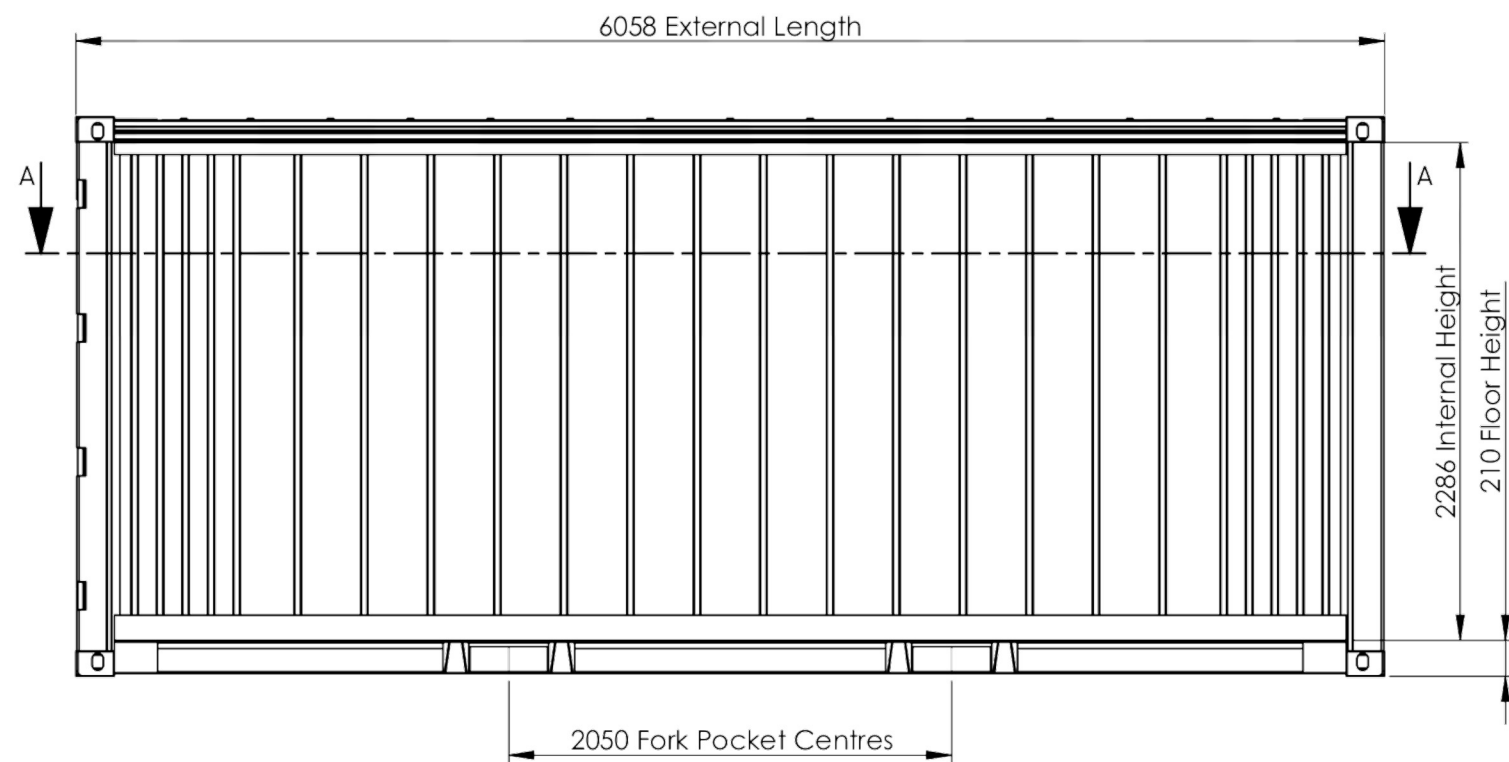
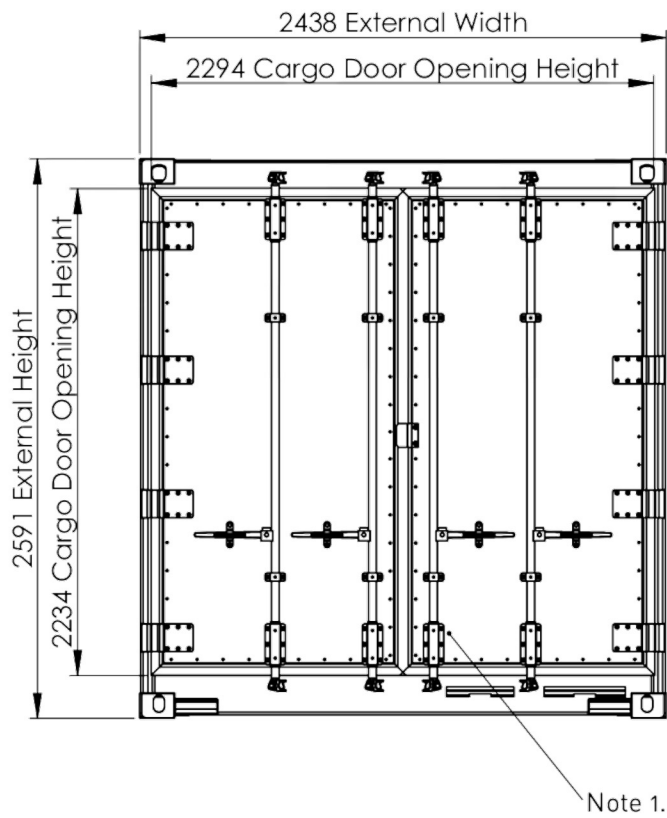


Max. Gross Weight	30,480 KG	67,200 LBS
Container Weight (Reefer Unit)	2,430 (380) KG	5,360 (838) LBS
Max. Payload	27,670 KG	61,010 LBS
Cubic Capacity	28.5 m <sup>3</sup>	1010 ft <sup>3</sup>
Floor Area	12.5 m <sup>2</sup>	135 ft <sup>2</sup>
Insulation Density	40 - 55 kg/m <sup>3</sup>	2.5 - 3.4 lb/ft <sup>3</sup>
Floor Strength	7,260 KG	16,000 LBS

Notes:  
 1. Cargo doors as standard. Some models may include a 'butchers' door, either in lieu of the cargo doors, or recessed behind. The butchers door will reduce internal length by approx. 200mm. Units with butchers doors will include integrated panic alarm systems, emergency lighting above the door, and automatic reefer cut-off switches to cease operation when the door is opened, among other features.

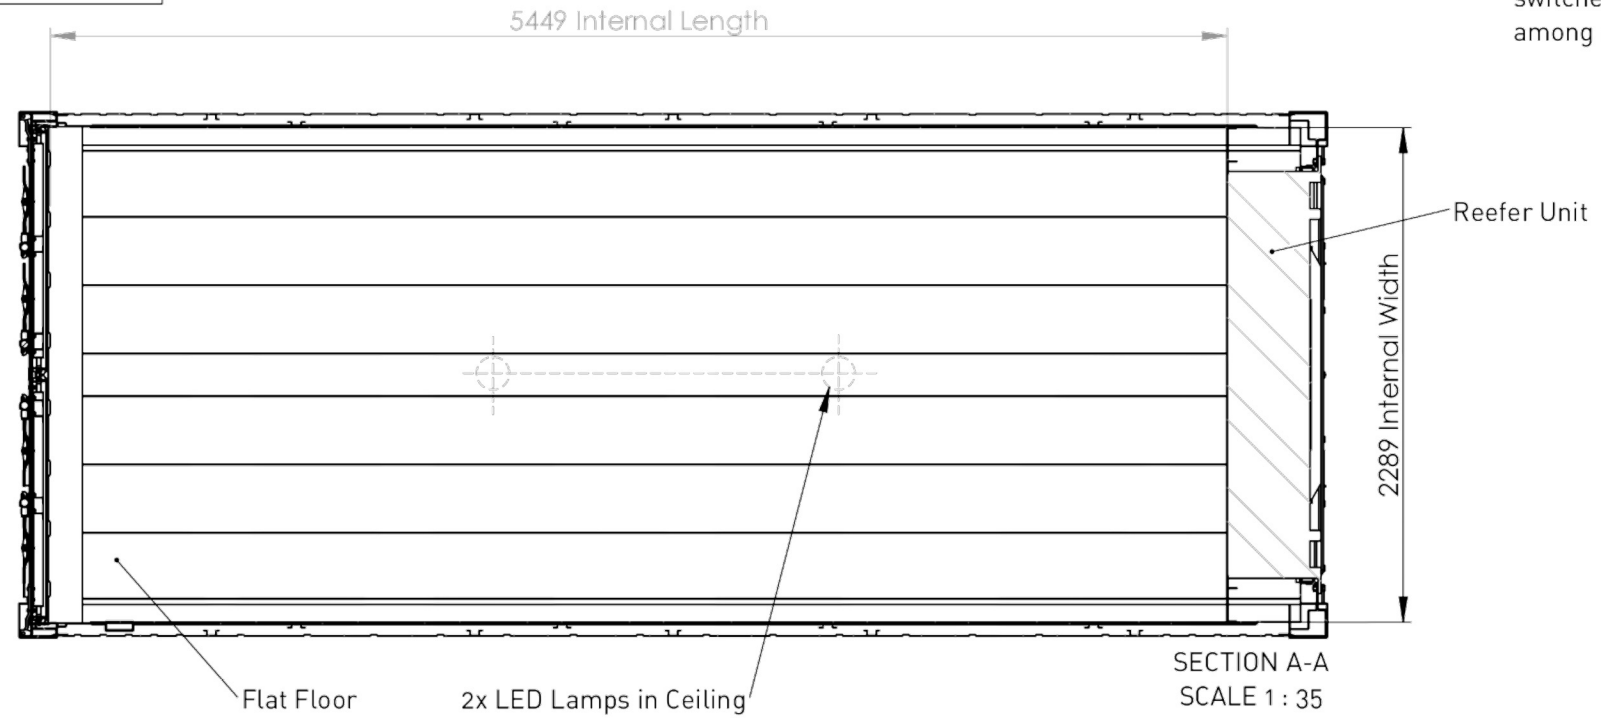

**Thermaright**  
Hire Solutions

	NAME	SIGNATURE	DATE
DRAWN	JM		29/01/2019
APPV'D			

©2019 Thermaright

Preliminary Drawing for Information Only	
REVISION:	DO NOT SCALE DRAWING
PROJECT:	Thermaright Containers Standard Containers
DESCRIPTION:	20' Refrigerated Container Standard Height Hire Specification
	A3
SCALE: 1:35 (UNLESS STATED OTHERWISE)	SHEET 1 OF 1